
December 1968 Brief 68-10540

NASA TECH BRIEF



NASA Tech Briefs are issued to summarize specific innovations derived from the U.S. space program, to encourage their commercial application. Copies are available to the public at 15 cents each from the Clearinghouse for Federal Scientific and Technical Information, Springfield, Virginia 22151.

Tube Joint Leak Repair Coupling

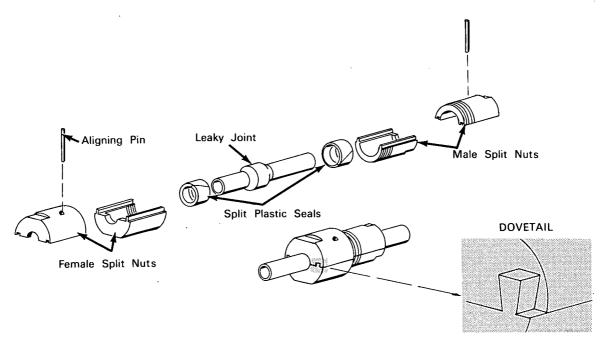

Prior methods of repairing leaking tube joints involved replacement of the soldered joint. This entailed removal of the union by debrazing or by machining and necessitated system flushing, purging, and recharging.

A technique has been conceived that accomplishes an effective repair to a leaking joint and requires none of the tasks mentioned above. The device consists of 2 split seals, I male split nut, I female split nut, and two aligning pins. Each split nut consists of 2 half-shell sections which, when engaged, are held together by a dovetail joint and an aligning pin. In application, the male split nut is inserted into the female split nut and retained by standard threads. The two

split nuts are torqued together, thus compressing the two split seals about the union and completely encapsulating the joint. This eliminates union leakage and prevents tubes from creeping out of the fitting due to shock or vibration.

Notes:

1. Hydrostatic leak testing with the split nuts set at 50 inch pounds torque resulted in no leakage under system pressures from 30 to 300 psi. Failure did not occur until 350 psi was reached. The same hardware was reassembled and the assembly torqued to 100 inch pounds. Testing was started at 300 psi and raised in 100 psi increments to 1150 psi, at which point failure occurred.

(continued overleaf)

This document was prepared under the sponsorship of the National Aeronautics and Space Administration. Neither the United States Government nor any person acting on behalf of the United States Government assumes any liability resulting from the use of the information contained in this document, or warrants that such use will be free from privately owned rights.

2. Documentation for the innovation is available from:

Clearinghouse for Federal Scientific and Technical Information Springfield, Virginia 22151 Price \$3.00

Reference: B68-10540

Patent status:

No patent action is contemplated by NASA.

Source: William B. Ferguson
of North American Rockwell Corporation
under contract to
Manned Spacecraft Center
(MSC-15022)